

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 20 TOWNSHIP 14 RANGE 4

DATE: 5-4-05

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 9-18-00



IN. S.P.C. E ZONE NAD '83

NAME: 14042002

N: 488792.8631(m)

E: 61870.0115(m)

Stop 11 Rd 8000 S

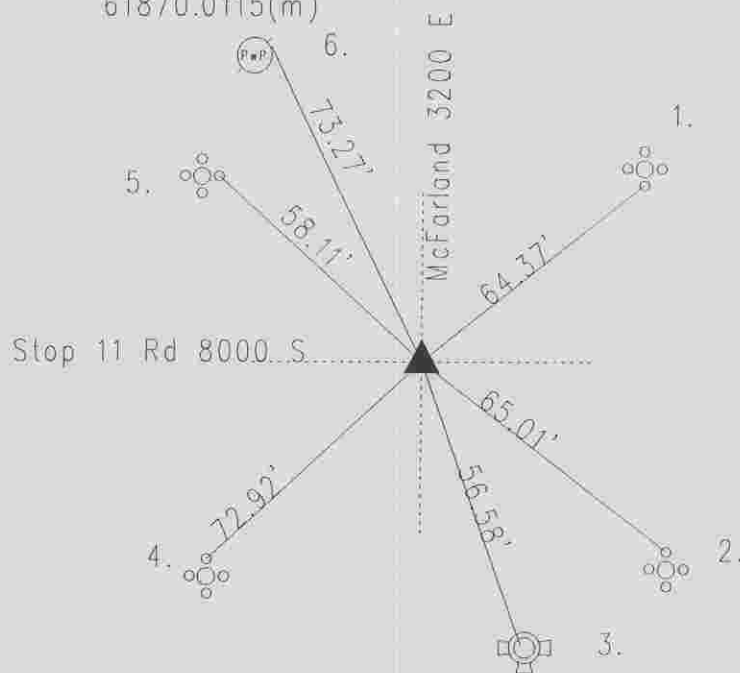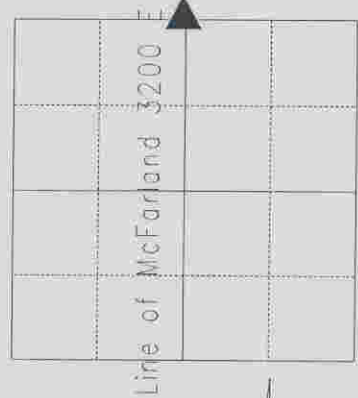

Original post set 1820 by Hendricks with witness: 24" white oak S 73 W 19 links, 18" ash N 58 e 22 links per Marion County Atlas pg. 9. Hosbrook 6-10-1851 called witness still standing per Perry Township Legal Survey Book pg. 24. Monroe 7-21-60 called a steel pin. McLand 4-15-70 called a railroad spike 4" down. Wilcoxon 7-17-75 called a railroad spike with cut 'x'. Wilcoxon 9-20-79 called a steel pin 5" down. Pruett 8-3-92 called a railroad spike with punch hole. Excavated 9-22-92. Wilcoxon found railroad spike at surface. Steel pin found 9" down under railroad spike. Set Harrison. Re-tied by Wilcoxon 9-18-00. Re-tied 5-4-05 by Wilcoxon. 14042002

REF.	DISTANCE	DESCRIPTION
1.	64.37'	Cut 'x' S bolt of aluminum pole base
2.	65.01'	Cut 'x' N bolt of aluminum pole base
3.	56.58'	Top nut of fire hydrant
4.	72.92'	Cut 'x' N bolt of aluminum pole base
5.	58.11'	Cut 'x' E bolt of aluminum pole base
6.	73.27'	PK nail NE PwP#236-790 A 20"up